

Congratulations on your new indoor signal solution.

This Cel-Fi system is designed to provide you with significant improvements in coverage as well as 3G data rates.

Setting up the system is extremely simple and consists of placing and plugging in two components; a Window Unit and a Coverage Unit.

By spending just a few minutes using the instructions in this guide, you can optimize the installation and get the very most from your new Cel-Fi System. If you have any trouble during setup, please use the trouble shooting steps included in this guide.

Need Help?

Visit us at www.celfihelp.com for an installation video and other helpful information regarding installation and trouble shooting.

In the package you will find:

- Window Unit
- Coverage Unit
- Two Power Adapters

CEL-FI **RS2** SINGLE BAND Quick Start Guide



Step 1

Find the spot with the best 3G coverage:

The first step in setting up your Cel-Fi system is to find the spot in your home or office that has the best 3G coverage by using your phone (3G icon must be displayed). This is typically by a window, and if you are in a multi-story building, upstairs windows are usually better than downstairs windows.




Step 2

Plug in the Window Unit:

Take the **Window Unit** and one power supply out of the box (both power supplies are identical, so you can use either one). Plug the **Window Unit** into an easily accessible outlet. Check to make sure that you can see at least 1 "Bar" on the display in the center of the device. If you do not see at least 1 bar, try a different location.




**WINDOW
UNIT**

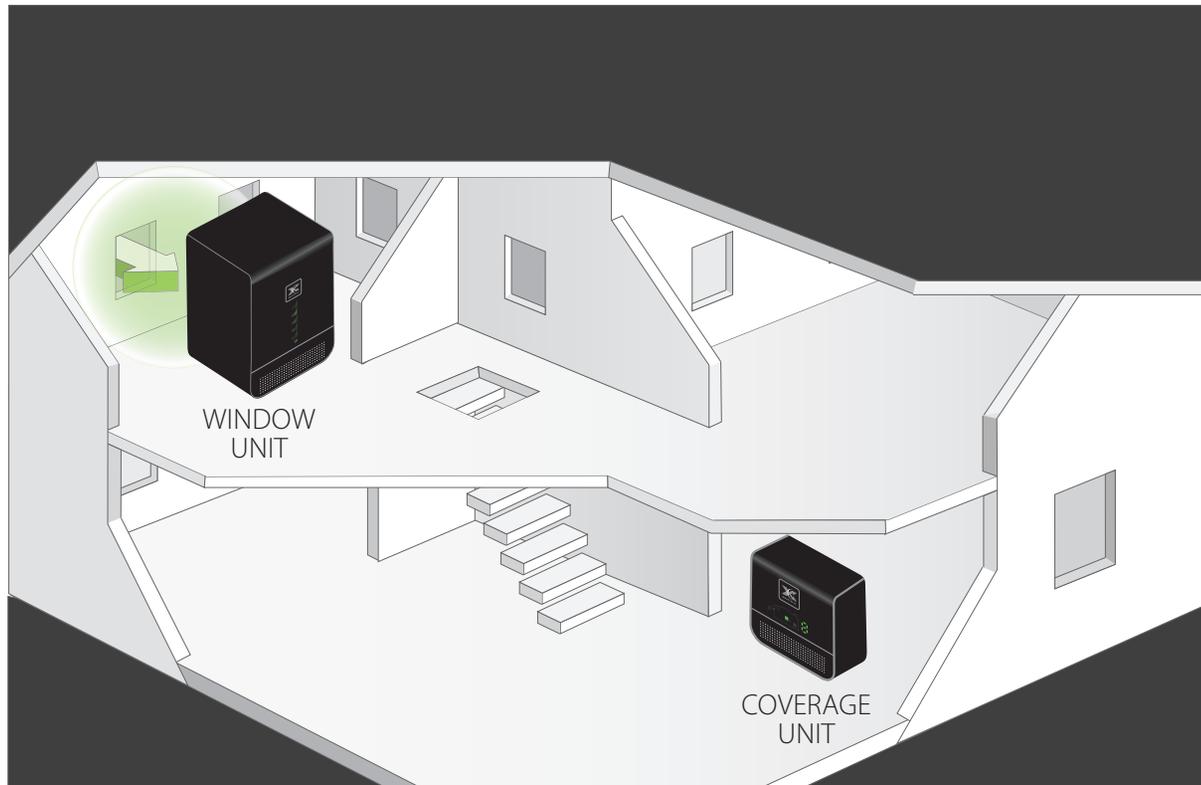

**WINDOW
UNIT**


**COVERAGE
UNIT**

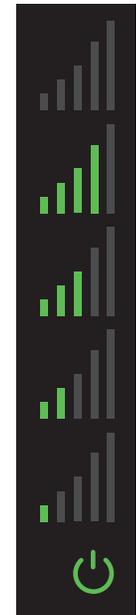

Step 3

Optimize the Window Unit Placement:


The number of bars you can see on the **Window Unit** make a significant difference in the operation of the Cel-Fi system. Try moving the **Window Unit** to a couple of different spots to see if you can get a better signal; the more bars the better.

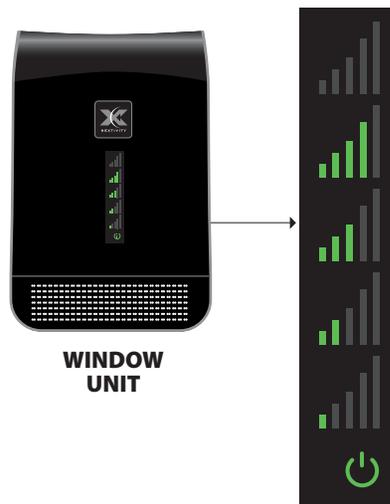

Step 4

Place the Coverage Unit:


Move to a location in your home where you need to have improved coverage. Plug the **Coverage Unit** into an easily accessible outlet. Wait until the numeric display stops cycling. This could take several minutes.

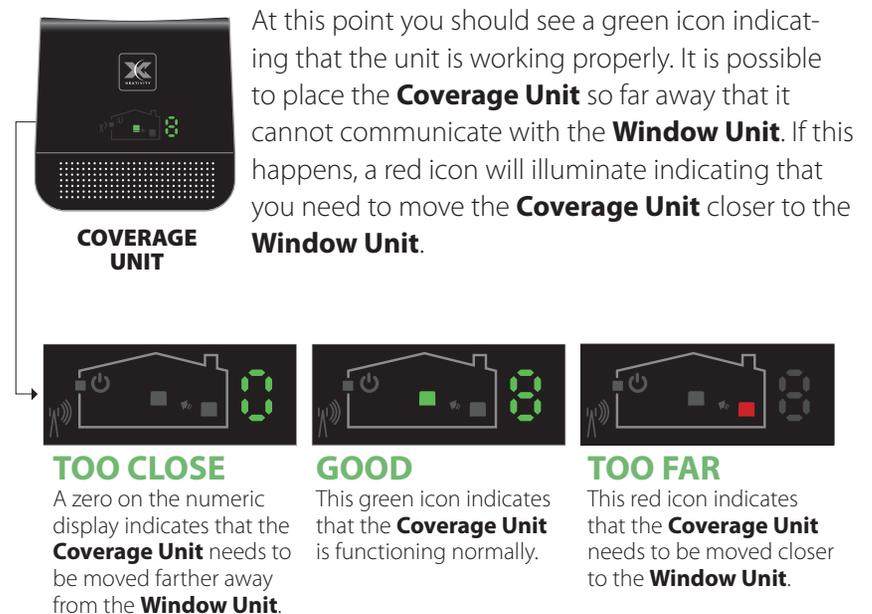


Step 5

Optimize The Coverage Unit Placement:

The farther away you place the **Coverage Unit** from the **Window Unit** the better the coverage in your home, so put the **Coverage Unit** as far away from the **Window Unit** as possible. The number shown on the side of the display gives you an indication as to the quality of the placement. Test two or three locations and for best results; try and get a 7, 8 or 9 on the display.

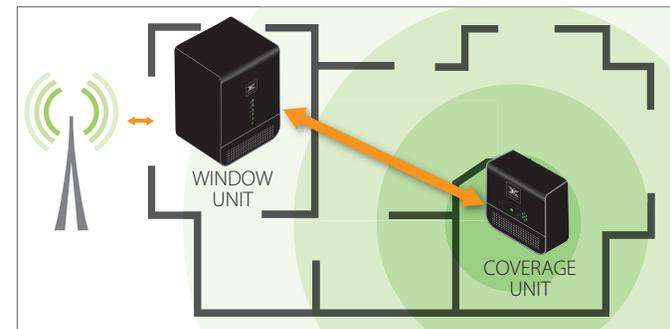

CELEFI RS2 Trouble Shooting

WINDOW UNIT	Indicator	Issue	Try This
 <p>Signal Indicators</p> <p>Power & Status</p>	 No lights on Window Unit display.	There is no power.	1. Is the unit plugged in? 2. Is there power at the outlet? 3. Try exchanging the power supplies with the Coverage Unit to see if the power supply is defective.
	 Status indicator is flashing green for more than a minute.	The Window Unit is attempting to select a channel between the units.	1. Wait for the status indicator to stop flashing, this could take several minutes.
	 Status indicator is on solid red.	Hardware Error.	1. Try resetting the Window Unit by unplugging it and then plugging it back in. 2. If problem persists return system for service/replacement.
	 No segment lit on signal display and status indicator on solid green.	Not receiving 3G signal.	1. Try moving the Window Unit to another room or area where you have more coverage. (Use your cell phone to find the best 3G coverage).
	Center three bars on signal display are flashing.	Network operator data is missing.	1. Insert operator SD card into Window Unit .
COVERAGE UNIT	Indicator	Issue	Try This
	 No lights on Coverage Unit display.	There is no power.	1. Is the unit plugged in? 2. Is there power at the outlet? 3. Try exchanging the power supplies with the Window Unit to see if the power supply is defective.
	 7 segment display is cycling for more than a minute.	The Coverage Unit is taking longer than normal to make a link.	1. Wait for the display to stop cycling, this could take several minutes 2. Move away from WiFi or other wireless devices.
	 7 segment display shows a value of 0.	The Coverage Unit is "Too Close" to the Window Unit .	1. Move the Coverage Unit farther away from the Window Unit .
	 Red "Too Far" Indicator.	The Coverage Unit is "Too Far" from the Window Unit	1. Move the Coverage Unit closer to the Window Unit .
	 Red Status Indicator.	Hardware Error.	1. Try resetting the Coverage Unit by unplugging it and then plugging it back in. 2. If problem persists return system for service.
ERROR MESSAGES	Indicator	Issue	Try This
	E1	No 3G signal on Window Unit .	Try moving the Window Unit to another room or area where you have coverage. (Use your cell phone to find the best 3G coverage).
	E3	Coverage Unit is overheating.	Make sure that the vents on the unit are not blocked. Move the unit to a cooler area. The system will start working normally when it cools down.
	E4	Window Unit is overheating.	The system will start working normally when it cools down.
	E8	Input signal too strong.	The signal from the wireless network is too strong to use a booster.
PERFORMANCE	Small Performance Improvement	Issue	Try This
	Low Coverage Unit number or Window Unit input signal.	Window Unit and Coverage Unit are too close together or Window Unit signal level is low.	Move Coverage Unit farther away from Window Unit to achieve a higher coverage unit number (even placing the Coverage Unit at the opposite end of the house). A higher number means better coverage. You can also improve performance by moving the Window Unit to a location with higher signal, the more bars the better!