

Signal Booster Installation Guide



DataPro™
Dual-Band
Signal Booster

Contents

Before Getting Started	1
Accessories and Antenna Options	1
Quick Installation Overview	2
Installation Diagram	2
Installing a Wilson Electronics External Adapter	3
Installing Outside Antenna	3
Installing the Signal Booster	3
Powering Up a Wilson Electronics Signal Booster	4
Installing Mounting Plate on DataPro Signal Booster	4
Warnings and Recommendations	5
Guarantee and Warranty	Back Cover
Signal Booster Specifications	Back Cover

Note: This manual contains important safety and operating information. Please read and follow the instructions in this manual. Failure to do so could be hazardous and result in damage to your signal booster.

Installation Instructions for the Following Wilson Electronics Signal Boosters:

DataPro: FCC ID: PWO2B1225 IC: 4726A-2B1225 Model: 2B1225

The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.

Before Getting Started

This guide will help you properly install your Wilson Electronics Signal Booster. **It is important to read through all of the installation steps for your particular application prior to installing any equipment.** Read through the instructions, visualize where all the equipment will need to be installed and do a soft installation before mounting any equipment. For further assistance please call our free U.S. based technical support: 866-294-1660.

Inside this Package

Accessories packaged may not exactly match the below photos due to upgrades



Accessories & Antenna Options

Yagi Antennas

800 MHz Yagi Cellular Antenna (301111)

1900 MHz Yagi PCS Antenna (301124)

800 MHz Yagi Cellular Antenna (301129)

Omni Directional Antennas

Mini Magnet Dual-Band (301113)

800/900 MHz Omni-Directional Antenna (301201)

Magnet Mount Dual-Band (301103)

Trucker Mount Dual-Band (301101)

NMO Mount Dual-Band (301104)

Marine Antenna Dual-Band (301130)

Accessories

Lightning Surge Protector (859902)

Mounting Plate (901138)


Quick Installation Overview

The following steps provide a summary of the signal booster/antenna installation process. Contact Wilson Electronics Technical Support Department with any questions at 866-294-1660.

1. Select a location to install the signal booster that is away from excessive heat, direct sunlight, moisture and that has proper ventilation. Do not place the signal booster in an air-tight enclosure.
2. Select a location on the top of the structure to install the outside antenna. Use a cell phone in test mode to find the strongest signal from the cell tower. Visit www.wilselectronics.com to find test mode function for your particular cell phone.
3. Run the outside antenna cable to the signal booster and attach it to the connector labeled "outside antenna."
4. An external adapter is required to connect the cell phone or cellular data card to the signal booster. The external adapter plugs into the included antenna extension cable and directly into a socket on the cell phone or cellular data card. Run the extension cable from the external adapter and attach it to the SMA-Male connector labeled "cellular phone or data card" on the signal booster.

Note: Be careful when plugging the connector in so as not to bend the center pins on the connectors. Ensure all cables have a tight connection.

5. Before powering up the signal booster verify that both the outside antenna and the inside antenna are connected and check that all connections are tight. Lightning protection is recommended for all in-building installations.

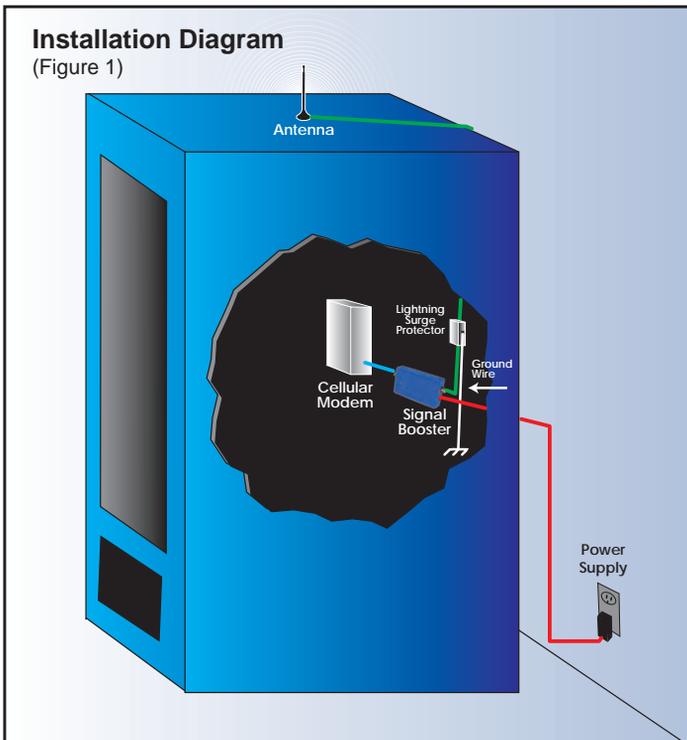

How it Works

Wilson Electronics signal boosters are bi-directional devices that deliver service levels consistent with what would be expected in areas of high cell network coverage. They amplify a weak or shadowed signal in mobile, marine and in-building applications.

When using a Wilson Electronics signal booster in conjunction with Wilson Electronics antennas, the outside antenna will collect the cell tower signal and send it through the cable to the signal booster. Cell phones and cellular data cards then communicate with the improved signal. When a cell phone or cellular data card transmits, the signal is amplified by the signal booster and broadcast back to the cell tower through the outside antenna.

Installing a Wilson Electronics External Adapter

An external adapter is required to connect the cell phone or cellular data card to the signal booster. The external adapter is cell phone/data card-specific and may be purchased through a local retailer. Refer to Wilson Electronics Adapter Guide to identify the correct adapter for your cell phone or cellular data card. The adapter guide is available through a local retailer or at www.wilsonelectronics.com. The external adapter plugs into the antenna extension cable (included) and directly into a socket on the cell phone or cellular data card.

The external adapter and the extension cable (included) are long enough to reach the signal booster location. This allows for ease and convenience of use. Run the extension cable from the external adapter and attach it to the SMA-Female connector labeled "cellular phone or data card" on the signal booster.

NOTE: Depending on your specific cell phone, the adapter socket may be located beneath a rubber plug.

Installing a Wilson Electronics Outside Antenna

Select a location on the top of the structure to install the outside antenna that has the most unobstructed line of sight to the cell tower. To obtain maximum performance, the antenna should point toward the cell tower. Follow the instructions included with the outside antenna and the RF Safety Warning (page 5).

Lightning protection is recommended for all stationary installations.

Take extreme care to ensure neither you nor the antenna come in contact with any electrical power lines.

Ensure there are at least three feet of clearance in all directions surrounding the antenna.

Installing a Wilson Electronics Signal Booster


1. Select a location to install the signal booster that is away from excessive heat, direct sunlight, moisture and that has proper ventilation. Ensure the signal booster is installed within six feet of where the cell phone or cellular data card will be used (to accommodate the six-foot adapter extension cable).
2. Run the cable from the outside antenna and attach it to the SMA-Female connector labeled "outside antenna" on the signal booster.

Powering up a Wilson Electronics Signal Booster

1. Ensure that both the outside antenna coax cable and the adapter coax cable are connected to the signal booster before powering up the signal booster.
2. Connect the AC/DC power supply to the power input labeled with the USB symbol on the signal booster. Plug the power supply into a wall outlet.
3. The indicator light on the top of the signal booster will be GREEN when the unit is powered up and working properly.
4. If light is off, ensure power supply connections are tight.

 **Warning:** Verify that both the outside antenna and the adapter extension cable are connected to the signal booster before powering up the signal booster.

 **Warning:** Use only a Wilson Electronics power supply. Use of a non-Wilson Electronics product could damage your equipment.

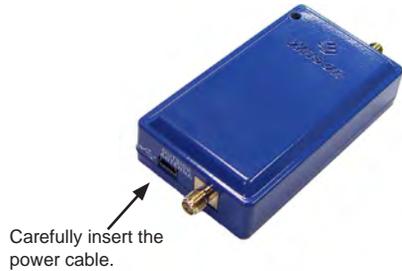


Testing a Wilson Electronics Signal Booster

To test your signal booster, go to a weak signal area where your cell phone registers only 1-2 bars without the signal booster turned on. Then, connect the signal booster to the phone and you should see a signal improvement of 2 or more bars. *Note: Many phones take up to 20 seconds to reset the bar indicator.*

Installing the mounting plate on DataPro™ Signal Booster (optional)

To purchase a mounting plate call 1-800-451-7273 Sales Team or visit www.wilson-electronics.com

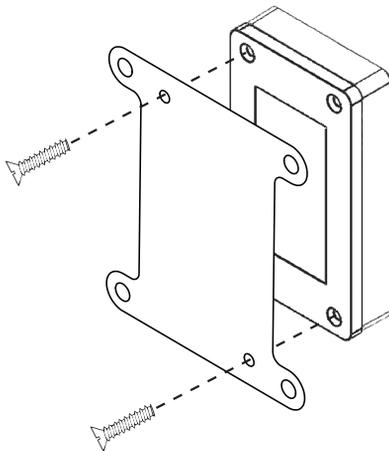


Remove two screws from back of signal booster that correspond with the mounting plate.

Place signal booster on mounting plate and reinstall the two screws previously removed from back of signal booster.


Caution: Do not remove "Void Sticker."

Mobile Installation

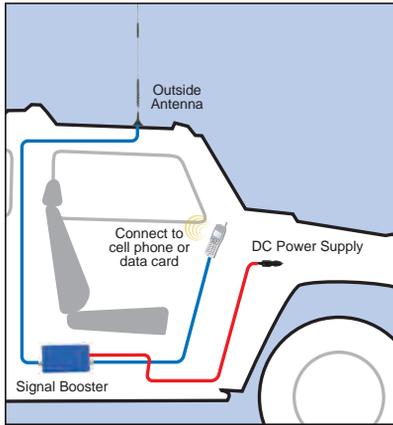

This is the recommended install for in-vehicle use. Contact our Technical Support Team for more information at: 1 800 368 1111 or tech@wilsonelectronics.com

In-Building Installation

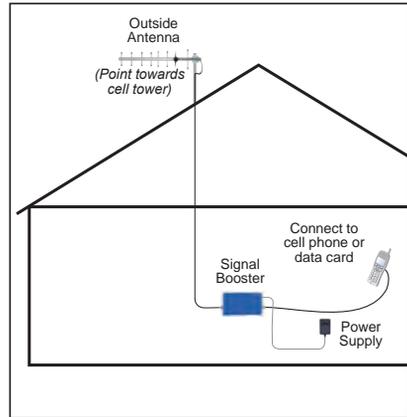

This is the recommended install for in-building use. Contact our Technical Support Team for more information at: 1 800 368 1111 or tech@wilsonelectronics.com

Warnings and Recommendations

-  **Warning:** Verify that both the outside antenna and the adapter extension cable are connected to the signal booster before powering up the signal booster.
-  **Warning:** Use only the power supply provided in this package. Use of a non-Wilson Electronics products may damage your equipment
-  **Warning:** **RF Safety:** All omni-directional antennas shown on page 1 must be installed so that the distance from the antenna to any person is no less than 8 inches. All Yagi antennas shown on page 1 must be installed so that the distance from the antenna to any person is no less than 26 inches. Yagi antennas may not be used indoors or in a mobile installation. Please contact Wilson Electronics Technical Support Team for safe distances from other antennas.

Lightning protection is recommended for all in-building installations.

NOTE: The aluminum casing of a Wilson Electronics signal booster will adjust very quickly to the ambient temperature of its environment. For example, in the summer, when the inside of a car can reach 140 degrees Fahrenheit, the signal booster temperature may be 150 degrees or higher. The casing will be hot to the touch, similar to a metal door handle or a steering wheel. Such high temperatures will not damage the signal booster, nor do they pose a fire risk to the structure. As recommended in these instructions, install the signal booster in a location with adequate ventilation. Keep the area free of items that could block air flow to the signal booster.



About Wilson Electronics

Wilson Electronics, Inc. has been a leader in the wireless communications industry for nearly 40 years. The company designs and manufactures signal boosters, antennas and related components that significantly improve cellular telephone signal reception and transmission in a wide variety of applications, mobile, in-building, and M2M.

With extensive experience in antenna and signal booster research and design, the company's engineering team uses a state-of-the-art testing laboratory, including an anechoic chamber and network analyzers, to fine-tune antenna designs and performance. For its signal boosters, Wilson Electronics uses a double electrically insulated RF enclosure and cell tower simulators for compliance testing.

Wilson Electronics signal boosters feature patent Smart Technology™ that enables them to automatically adjust their power based on cell tower requirements. By detecting and preventing oscillation feedback, signal overload and interference with other users, these Smart Technology™ signal boosters improve network cell phone areas without compromising carrier systems.

All products are engineered and assembled in the company's 55,000-square-foot headquarters in St. George, Utah. Wilson Electronics has product dealers in all 50 states as well as in countries around the world.

Disclaimer: The information provided by Wilson Electronics, Inc. is believed to be complete and accurate. However, no responsibility is assumed by Wilson Electronics, Inc. for any business or personal losses arising from its use, or for any infringements of patents or other rights of third parties that may result from its use.

Copyright © 2011 Wilson Electronics, Inc. All rights reserved.

Operation is subject to the following two conditions: (1) This device may not cause interference and (2) this device must accept any interference, including interference that may cause undesired operation of this device.

One or more of the following U.S. Patent numbers may apply to the Signal Booster in this product – D596,614; D596,615; D563,381; 7,729,669; 7,486,929; 7,729,656; 7,409,186; 7,783,318; 7,684,838; 12,714,994.

Contact ,] • ǻ ǻ } } æ Technical Support Team with any questions at | € | € | € | | |
or email: tech@w] • ǻ ǻ } } æ.com Hours: 7 am to 6 pm MST.

30-Day Money-Back Guarantee

All Wilson Electronics products are protected by Wilson Electronic's 30-day money-back guarantee. If for any reason the performance of any product is not acceptable, simply return the product directly to the reseller with a dated proof of purchase.

1-Year Warranty

Wilson Electronics signal boosters are warranted for one (1) year against defects in workmanship and/or materials. Warranty cases may be resolved by returning the product directly to the reseller with a dated proof of purchase.

Signal boosters may also be returned directly to the manufacturer at the consumer's expense, with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by Wilson Electronics. Wilson Electronics shall, at its option, either repair or replace the product. Wilson Electronics will pay for delivery of the repaired or replaced product back to the original consumer if located within the continental U.S.

This warranty does not apply to any signal boosters determined by Wilson Electronics to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties.

RMA numbers may be obtained by phoning Technical Support at 1 800 828 1111

Signal Booster Specifications

Dual Band	
800/1900 MHz Specifications	
Model Number / Part Number	2B1225
Connectors	SMA Female
Impedance (Input/output)	50 ohms
Dimensions	3.9 x 2.1 x 0.9 in with mounting plate 3.9 x 1.9 x .08 in without mounting plate
Frequency	824-894 MHz / 1850-1980 MHz
Passband Gain (nominal)	Factory set: 5 dB minimum to 20 dB maximum
*20 dB Bandwidth (nominal)	
800 MHz	30 MHz
1900 MHz	68 MHz
Power output for single cell phone (uplink)	
CDMA	800 MHz 30.0 dBm 32.7 dBm
GSM	28.4 dBm 29.0 dBm
EDGE	28.3 dBm 28.9 dBm
WCDMA	31.5 dBm 32.4 dBm
Power output for single received channel (downlink)	
CDMA	800 MHz -3.2 dBm -19.3 dBm
GSM	-2.4 dBm -1.1 dBm
EDGE	-3.3 dBm -1.2 dBm
WCDMA	-3.8 dBm -2.0 dBm
^{3,4}Power output for multiple received channels (downlink). The maximum power is reduced by the number of channels:	
Number of channels	Maximum Power ³
2	800 MHz -10.9 dBm -14.4 dBm -8.8 dBm
3	-14.4 dBm -16.9 dBm -11.3 dBm
4	-16.9 dBm -18.9 dBm -14.8 dBm
5	-18.9 dBm -20.5 dBm
6	-20.5 dBm -14.8 dBm
Noise Figure (typical)	3 dB nominal
Isolation	> 60 dB
Power Requirements	
	5V DC, 1A

- Notes:
- Nominal gain is the maximum gain at any frequency in the passband.
 - Nominal bandwidth is the difference between two frequencies that are adjacent to the passband where the amplification is 20 dB lower than the passband amplification. One of the frequencies is lower than the passband and the other is higher.
 - The Manufacturer's rated output power of this equipment is for single carrier operation. For situations when multiple carrier signals are present, the rating would have to be reduced by 3.5 dB, especially where the output signal is re-radiated and can cause interference to adjacent band users. This power reduction is to be by means of input power or gain reduction and not by an attenuator at the output of the device.
 - The maximum power for 2 or more simultaneous signals will be reduced by 6 dB every time the number of signals is doubled.



7389 Airport View Drive SW Suite 200 Rochester Mn
 For additional Technical Support visit www.wpsantennas.com
 or email at: tech@wpsantennas.com
 Phone: 507-282-8484 Fax: 866-827-4052